


## VMSKV-B 40-19



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

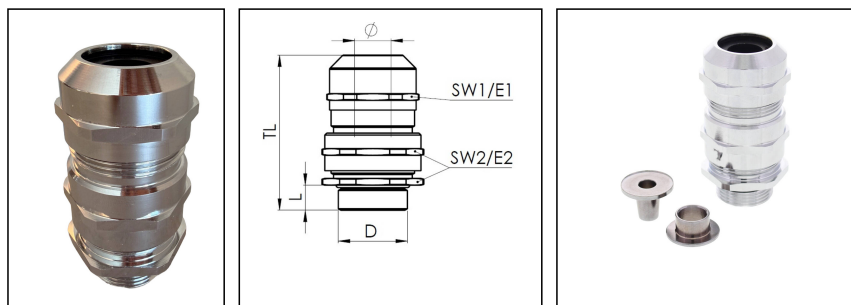

|                                |                                  |
|--------------------------------|----------------------------------|
| Material cable gland           | Brass lead-free chromium-plat.   |
| Material sealing gasket        | EPDM                             |
| Material earthing insert       | brass lead-free chromium plat.   |
| Temp. range min                | -40 °C                           |
| Temp. range max                | 100 °C                           |
| Protection class               | IP66 / IP68 (5 bar 30 min), IP69 |
| Thread type                    | M                                |
| Ø Connection thread D          | 40                               |
| Lead                           | 1,5                              |
| Length screw-in thread L       | 13 mm                            |
| Ø cable diameter min           | 16 mm                            |
| Ø cable diameter max           | 28 mm                            |
| Ø cable below cable shield max | 19 mm                            |
| Key width SW1                  | 45 mm                            |
| Key width SW2                  | 50 mm                            |
| Collar diameter E1             | 48 mm                            |
| Collar diameter E2             | 53 mm                            |
| Total length TL                | 64,5 mm - 80,5 mm                |
| Type of cable anchorage        | A                                |
| Install. torques fitting       | 20 N m                           |
| Install. torques cap nut       | 20 N m                           |
| Impact category                | 6                                |
| Surface                        | Chromium-plated                  |
| WISKA-Order no.                | 10114096                         |
| Type                           | VMSKV-B 40-19                    |

Your Contact:

WISKA Electric Systems (Shanghai) Co., Ltd · 维司卡电气设备(上海)有限公司

Room 703, Building 4, No. 258 Jinzang Road, Pudong Jinqiao Export Processing Zone, Shanghai, P.R.China 201206

上海市浦东新区金桥出口加工区金藏路258号4号楼703室 201206

☎ +86-21-58440056 · ☎ +86-21-58440027 · 📠 +86-21-58440031 · [contact@wiska.cn](mailto:contact@wiska.cn) · [www.wiska.cn](http://www.wiska.cn)

Other technical data on request / subject to change without notice

|                        |                        |
|------------------------|------------------------|
| Packing unit           | 5                      |
| Tariff number          | 85369010               |
| EAN number             | 4007686326772          |
| ETIM-Classification    | EC000441               |
| VG Registration number | E71E330/26002          |
| VG Labeling            | VG88846-4-A015-19-B-LF |

29.08.2026

Your Contact:


**WISKA Electric Systems (Shanghai) Co., Ltd** · 维司卡电气设备(上海)有限公司

Room 703, Building 4, No. 258 Jinzang Road, Pudong Jinqiao Export Processing Zone, Shanghai, P.R.China 201206

上海市浦东新区金桥出口加工区金藏路258号4号楼703室 201206

☎ +86-21-58440056 · ☎ +86-21-58440027 · 📠 +86-21-58440031 · [contact@wiska.cn](mailto:contact@wiska.cn) · [www.wiska.cn](http://www.wiska.cn)

Other technical data on request / subject to change without notice

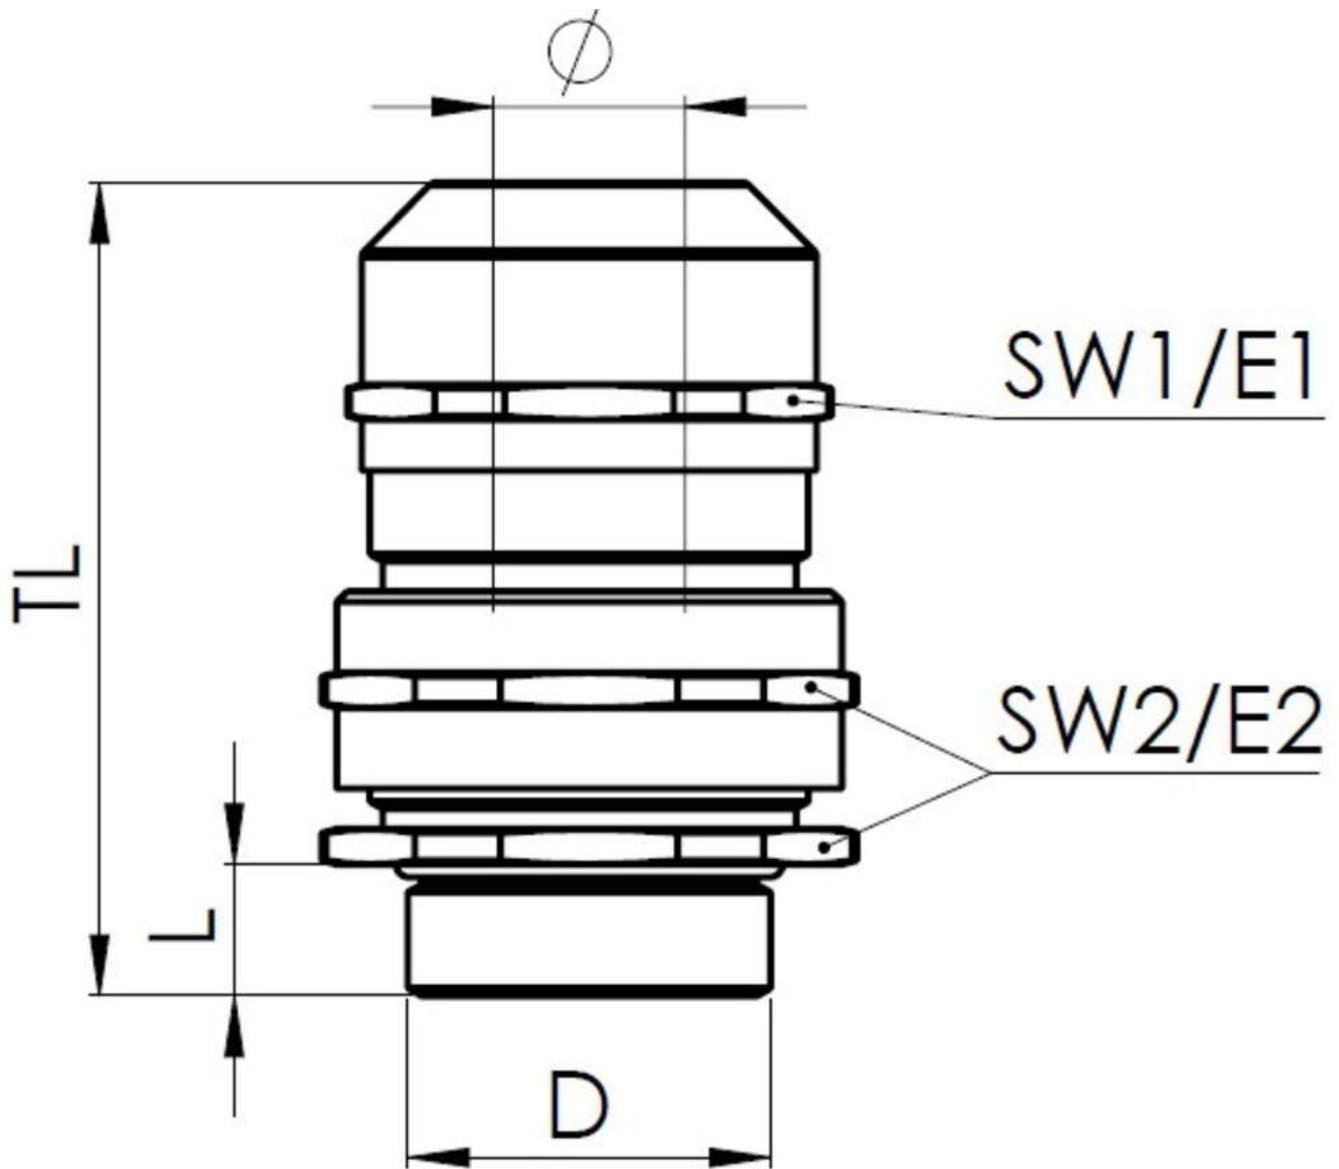

Your Contact:

WISKA Electric Systems (Shanghai) Co., Ltd · 维司卡电气设备(上海)有限公司

Room 703, Building 4, No. 258 Jinzang Road, Pudong Jinqiao Export Processing Zone, Shanghai, P.R.China 201206

上海市浦东新区金桥出口加工区金藏路258号4号楼703室 201206

☎ +86-21-58440056 · ☎ +86-21-58440027 · 📠 +86-21-58440031 · [contact@wiska.cn](mailto:contact@wiska.cn) · [www.wiska.cn](http://www.wiska.cn)

Other technical data on request / subject to change without notice